




BREZZA

D E S I G N I T A L Y

Technical sheet
BZ9879855

Tuttospessore
Arrow Graphite
BZ9879855

BREZZA
DESIGN ITALY

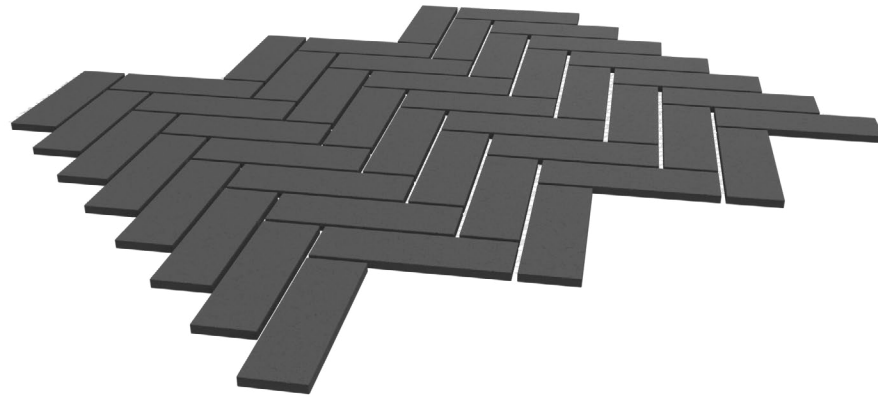

Arrow Graphite

The ARROW TUTTOSPESSORE mosaic by BREZZA Design Italy presents a very dynamic pattern, its interlocking herringbone pieces allow this to be a very attractive, resistant and timeless design element. Their neutral tones facilitate the combination of these tiles with different colors and materials around them. Its resistance and shape allows it to be installed on floors, walls, interior and exterior spaces, tops, decorations, etc.



Natural



Matt



Suitable for floor installation



Suitable for wall installation



Exterior



Interior





High traffic



VI shade variation

Tuttospessore
Arrow Graphite
BZ9879855

BREZZA
DESIGN ITALY

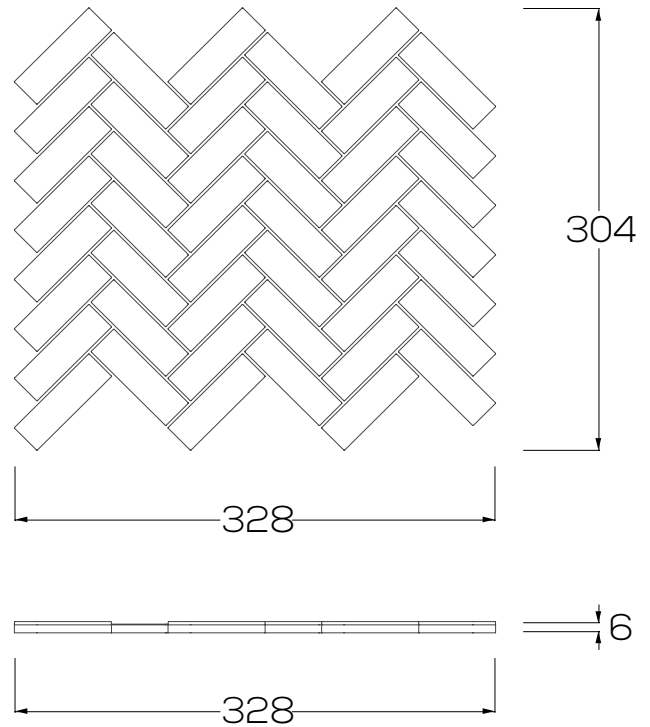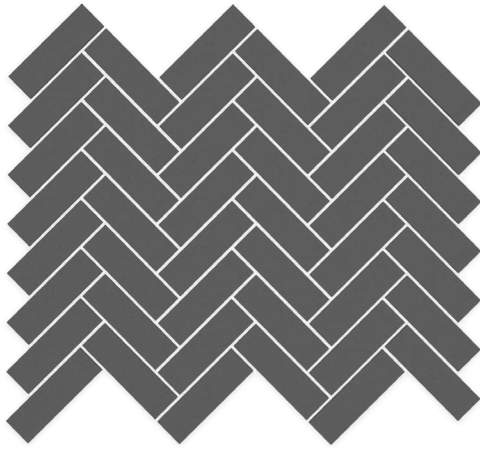

Texture

As it is a porcelain material, in its purest composition, it has a very organic texture that is pleasant to the touch and very subtle to the eye. The ARROW TUTTOSPESSORE mosaic from BREZZA Design Italy has a matte finish ideal for your spaces.



Tuttospessore
Arrow Graphite
BZ9879855


BREZZA
DESIGN ITALY



The Graphite is nothing more than the absence of the other colors, it is the lack of light. Represents strength and elegance in addition to the drama within the interior, it can be used as a striking element within the design of the space, as well as highlight in small details. It is a bold and daring color, but always very elegant.



www.brezzadesign.it

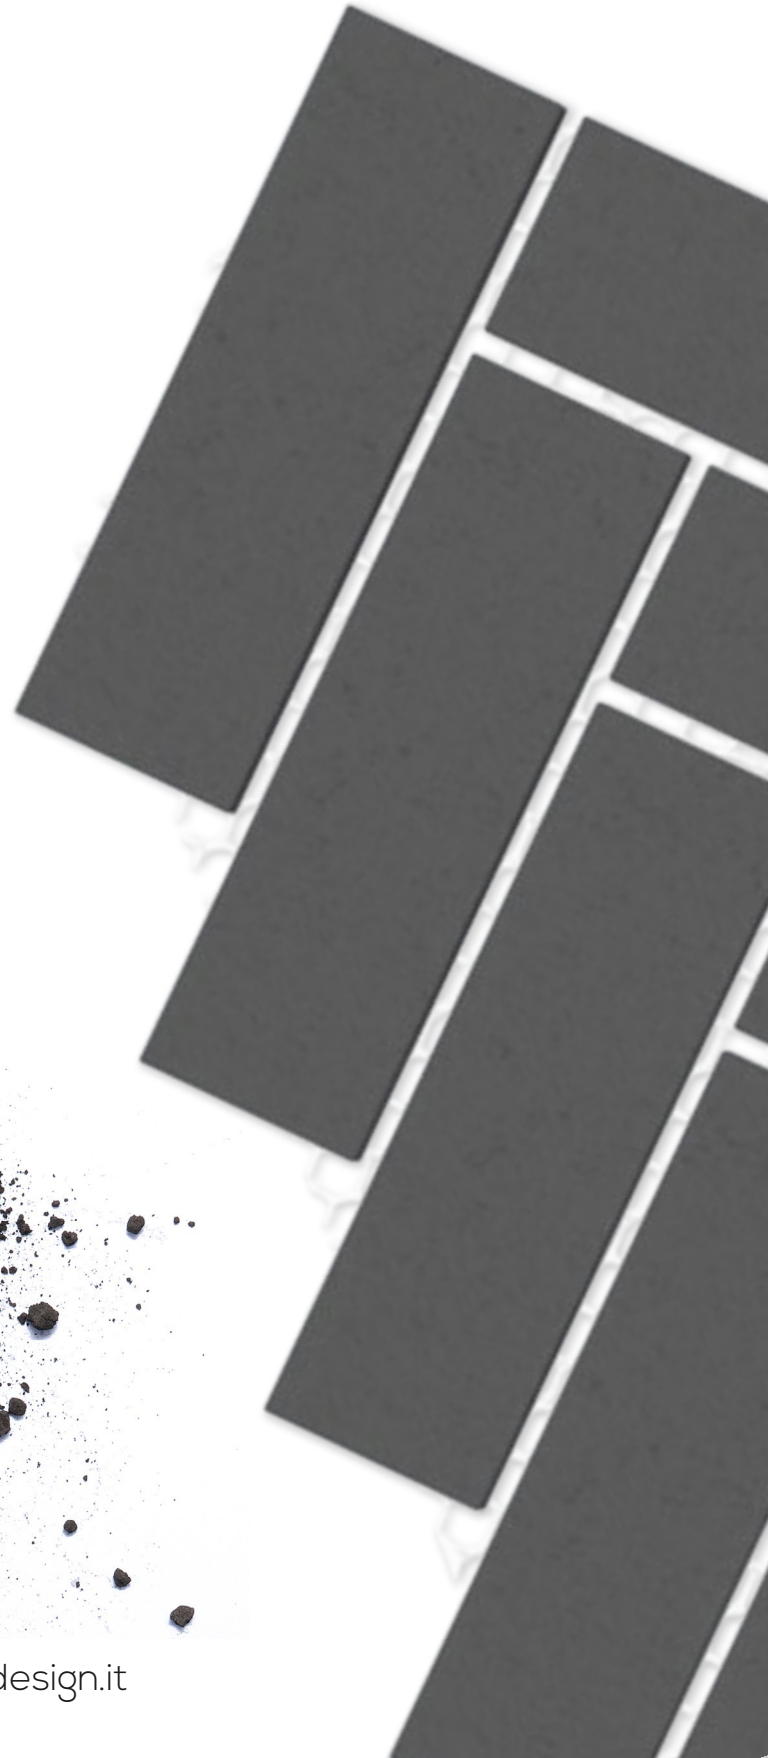

SPECIFICATION	TEST METHODS	REQUIREMENTS IN ACCORDANCE TO THE STANDARDS	BREZZA AVERAGE VALUE
WATER ABSORPTION	ISO 10545-3	≤ 0,5%	≤ 0,2%
FLEXURAL RESISTANCE	ISO 10545-4	Min./MNH 35 N/mm ²	Min./MNH 40 N/mm ²
MODULUS OF RUPTURE	ISO 10545-4	THICKNESS ≥ 7,5mm: min. 1300 N	THICKNESS ≥ 7,5mm: min. 1300 N
DEEP ABRASION RESISTANCE	ISO 10545-6	≤ 175 mm ³	≤ 175 mm ³
RESISTANCE TO SURFACE ABRASION	ISO 10545-7	CLASSES 0-5	CLASSES 0-5
LINEAR EXPANSION THERMIC COEFFICIENT	ISO 10545-8	AVAILABLE ON REQUEST	INSIGNIFICANT
RESISTANCE TO SUDDEN TEMPERATURE CHANGES	ISO 10545-9	AVAILABLE ON REQUEST	YES
FROST RESISTANCE	ISO 10545-12	ALWAYS TESTED - EXIGEE	ALWAYS TESTED - EXIGEE
HOUSEHOLD CHEMICALS AND SWIMMING POOL WATER CLEANSERS	ISO 10545-13	UGL min. UB MNH. UB GL min. GB MNH. GB UGL FROM ULA, ULB TO ULC - DE ULB A ULC GL FROM GLA, GLB TO GLC - DE GLA, GLB A GLC	UGL min. UB MNH. UB GL min. GB MNH. GB UGL FROM ULA, ULB TO ULC- DE ULB A ULC GL FROM GLA, GLB TO GLC- DE GLA, GLB A GLC
ACIDS AND LOW CONCENTRATION ALKALIS	ISO 10545-13	UGL min. UB MNH. UB GL min. GB MNH. GB UGL FROM ULA, ULB TO ULC - DE ULB A ULC GL FROM GLA, GLB TO GLC - DE GLA, GLB A GLC	UGL min. UB MNH. UB GL min. GB MNH. GB UGL FROM ULA, ULB TO ULC - DE ULB A ULC GL FROM GLA, GLB TO GLC - DE GLA, GLB A GLC
ACIDS AND HIGH CONCENTRATION ALKALIS		AVAILABLE ON REQUEST	AVAILABLE ON REQUEST
STAIN RESISTANCE	ISO 10545-14	AVAILABLE ON REQUEST	STAIN RESISTANCE
COLOURS STABILITY TO LIGHT	DIN 51094	THEY DO NOT HAVE TO SHOW VISIBLE COLOUR ALTERATION	STABLE IN OUTDOOR AND INDOOR CONDITIONS

Tuttospessore
Arrow Graphite
BZ9879855

BREZZA
DESIGN ITALY



www.brezzadesign.it